



Flat Bed Truck
CLW5250TPBA3





Chassis Parameters

Make & Model: Dongfeng EQ1251FQ1

Parameter	Specification	
Data parameter	Chassis outline parameters Length * width * height (mm)	9930*2500*3200
	Wheelbase (mm)	4350+1350
	Wheel base (front and rear) (mm)	1950/1880
	Front/rear overhang (mm)	1500/1950
	Approach Angle/departure Angle (°)	19/22
	Min. ground clearance (mm)	240
	Fuel tank volume (L)	400
Performance parameter	Max. speed (km/h)	89
	Max. Gradient (°)	25
Engine	Type	Vertical, in-line, water-cooled, turbocharged
	Model	YC6L270-33
	Production enterprise	Yuchai
	Displacement (cc)	8424
	No. of Cylinder	6
	Fuel type	Diesel
	Rated functional power (kw/rpm)	199/2200
	Torque (N.m/rpm)	1000/1400
	Emission standard	Euro III
Clutch	Type	Single disc diaphragm spring push clutch
	Operating mode	Hydraulic control
Gearbox	Type	Mechanical
	Model	9JS119
	Production enterprise	Fast
	Drive	6x4
	Operating mode	Remote dual flexible shaft control
	Number of gears/Type	9 speed (8+1)/ Manual
Body frame	Structural pattern	Trapezoidal riveted construction
Electric appliance	Battery (V/Ah)	24/140
	Battery (Pcs)	2
Body	Model	Tianjin
	Type	Four doors Five seats, reversible
	No. of Seats	2 + 3
	Driving side	LHD
Steering	Type	Power steering
Tyre	Size/quantity	11.00R20 16PR / 10+1pcs

Axles	No. of Axles	3
Axles rated load	Front axles rated load (kg)	6500
	Rear axles rated load (kg)	13000*2
Brake system	Type	Pneumatic
Suspension	Type	Multiple leaf springs
	Front leaf spring	8
	Rear leaf spring	10+8
Cab	• Adjustable front seats • standard interior • Seat belts • Fog lights • Laminated windshield • Wipers • Window and door glass • Sun visor in the cab • Air condition • Direction assist • Central lock • Electric window	

Chassis Drawing

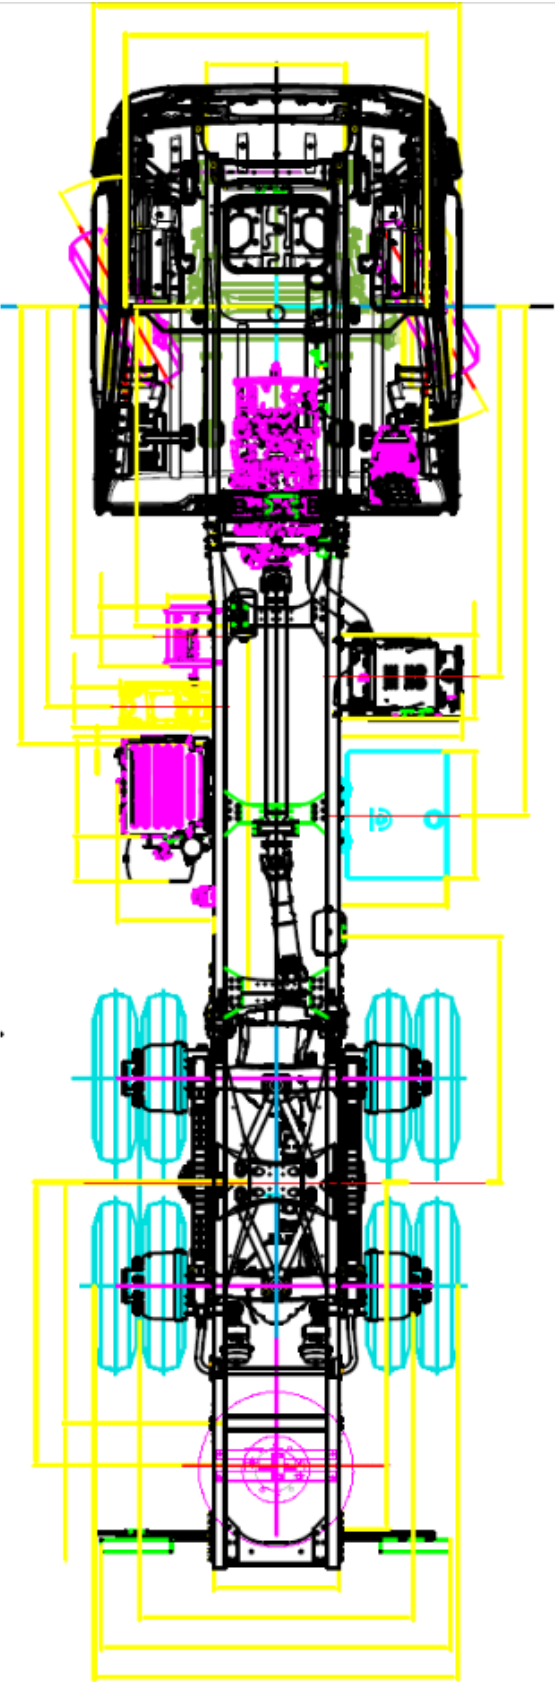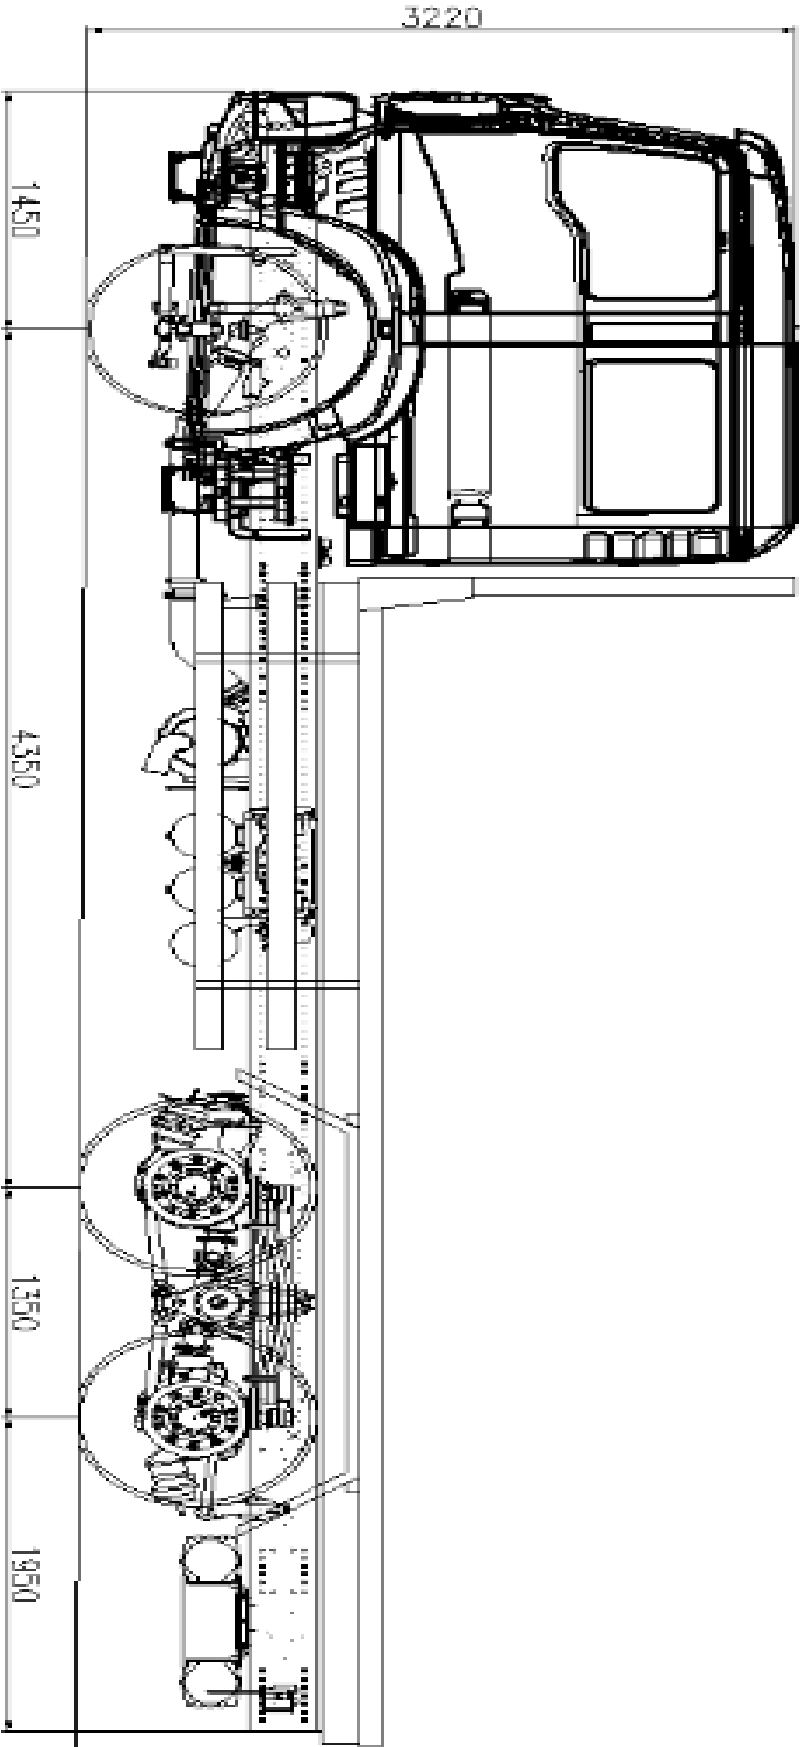

Vehicle Parameters

Model: CLW5250TPBA3


Parameter		Specification
Overall dimension (mm)		10500*2550*3220
Rated Load capacity (Kg)		20000
G.V.W (Kg)		25000
Body Structure	Total length (mm)	10500
	Total Width (mm)	2500
	Effective load (Ton)	20
	Material thickness (mm)	5
Features		Container mounting holes with locking bolts
		Protection between loading area and Cabin
		Body with mounting holes for fastening straps - rope tightener.

Cargo Straps

Straps	Qty	picture
Strap pack Size: Standard	1 set	
Transport strap Size: Standard	1 set	
Ratchet strap Size: Standard	1 set	
Utility strap Size: Standard	1 set	

Winch strap Size: Standard	1 set	
Winch bar Size: Standard	1 set	
Chain binders Size: Standard	1 set	
Tie dow strap Size: Standard	1 set	
D rings Size: Standard	1 set	
Other accessories if required for the full functioning of cargo transport		

Vehicle Drawing

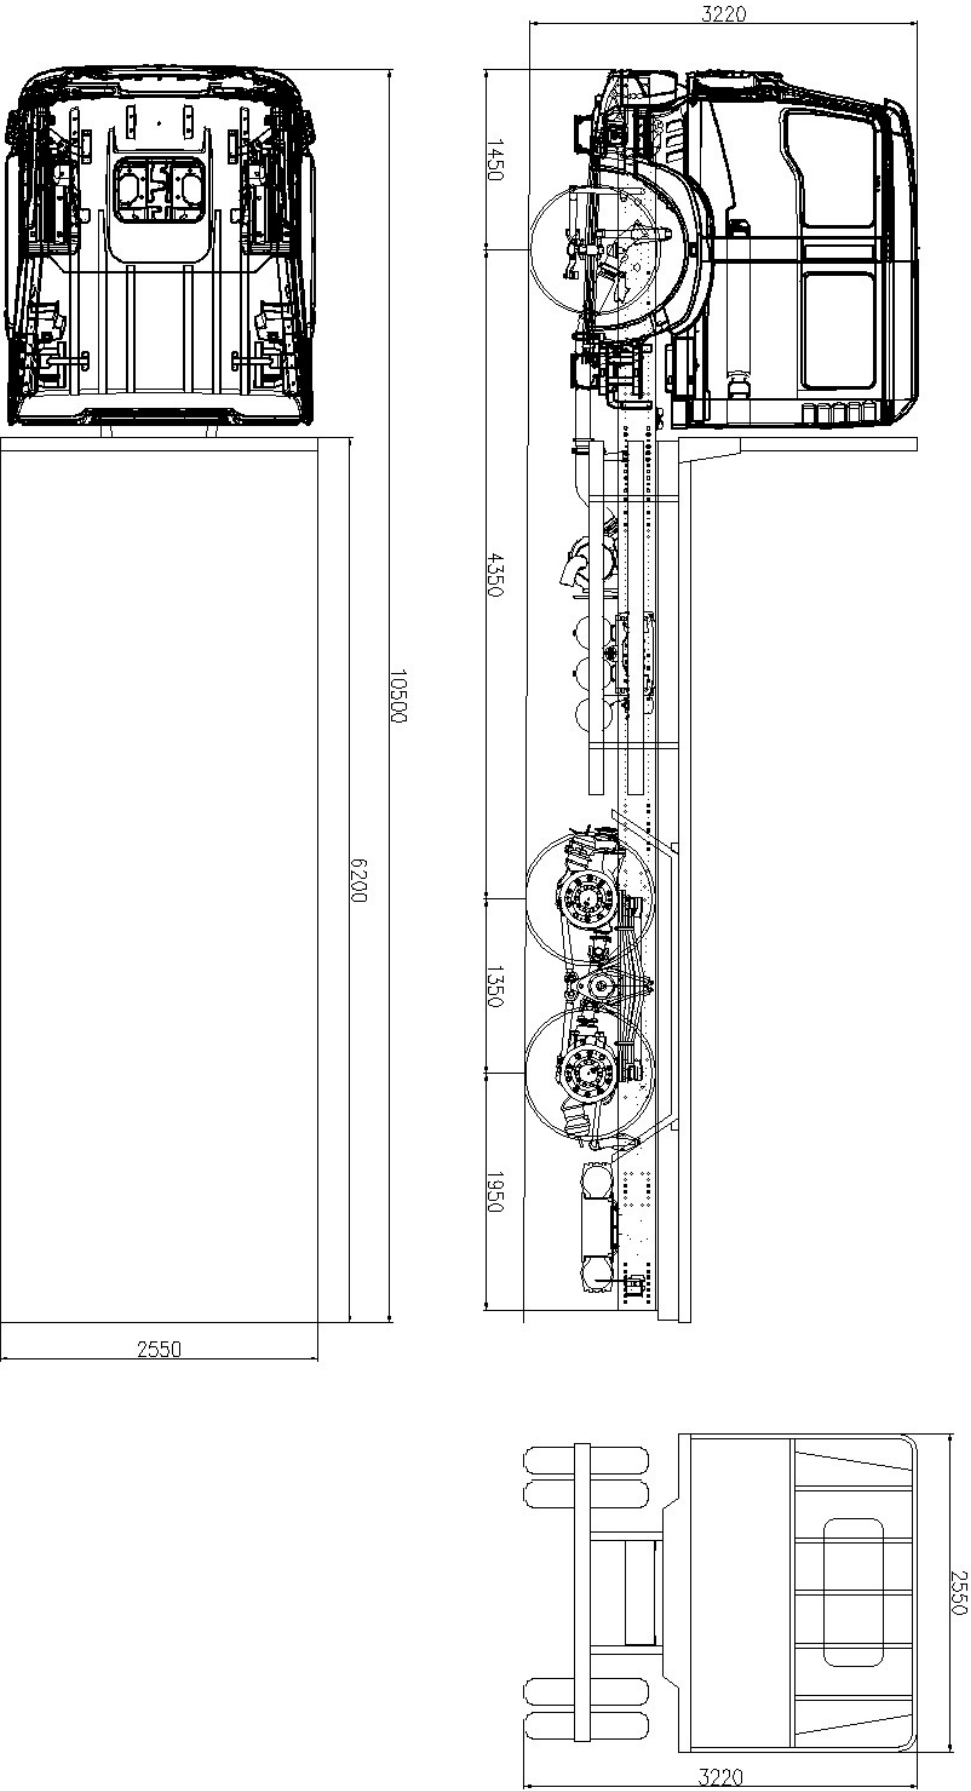

Engine picture reference



Factory



CLW GROUP

CHENGLI SPECIAL AUTOMOBILE CO., LTD

Tel/Fax: +86-722-3237188

Susan WhatsApp: +8615897602177 Joyce:

WhatsApp: +861329890945

Aiden Qiu: WhatsApp: +8613597846769

Email: info@clspecialtruck.com

Add: South Suburb Chengli Automobile
Industry Park, Suizhou City, Hubei Province,
China

Web: www.clw-specialtruck.com

